

Project:	Part #:	,
Type:		



Commercial Downlight Wattage + CCT Selectable

3 CCT: 30/40/50K

Introducing EnVision LED's new Commercial Downlight with selectable wattage and color! Usinged EnVisions Select-N-Switch technology, easily select between a number of different wattages, and choose between 3000K, 4000K, and 5000K. Select 9 different color and lumen packages ALL-IN-ONE.

Mounting and Installation:

• Retrofit: cut-out ceiling size:

4": 4.9"

6": 6-1/8" - 7- 3/16"

8": 7-1/2" - 8-7/8" 10": 9" to 10"

This fixture does not fit into a recessed can.
 No housing required for remodel applications.
 Use a new construction plate for new construction. See Accessories on page 3.

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- IC Rated and ASTM-E283 Air-Tight
- Meets CA Title 24 JA8 Requirement
- FCC CFR 47, FCC Part 15, Subpart B:2017
- 5 Year EnVision LED Limited Warranty

Whats Included:

- LED Fixture
- Junction Box Mounting Plate
- Mounting Screws
- Installation Guide

Detail Specification:

- · Wet Location Location Rated
- CRI 90 LED Chip, R9>50
- 120-277V Driver, 50/60Hz
- 6" & 8": 80° Beam, 10": 90° Beam
- Operating Temperature: 0°F ~ +113°F
- PF >0.9. THD < 20%
- 0-10V Dimmable Down to 5%

Applications:

- Residential and Commercial Lighting
- New Construction or Remodel Use
- Recessed Lighting

Product Information:

- Select-N-Switch Technology
- Metal trim and module for better heat dissipation and longevity
- · Various trim colors available
- PC lens reduces glare and optimizes even beam distribution
- Optional Emergency Backup Available: delivers full lumens in EM mode up to 25W
- L70 @ 50,000 Hours lumen maintenance





LED-CMDCommercial Downlight

2 Size/Watts

4-3M19 4 Inch (9/14/19W-750/1000/1500lm) **6-3M19** 6 Inch (9/13/19W-800/1200/1600lm) **8-3M29** 8 Inch (16.5/23/29W-1500/2000/2500lm) **10-3M38** 10 Inch (21/30/38W-1250/2000/3000lm) 3 Color

TRI Selectable 30K / 40K / 50K 4 Voltage

UNV 120-277V **HV** 347-480V

5 Emergency

(Blank) None EMB 25W HV External

Specs and model numbers are subject to change with or without notice














Commercial Downlight Wattage + CCT Selectable

3 CCT: 30/40/50K

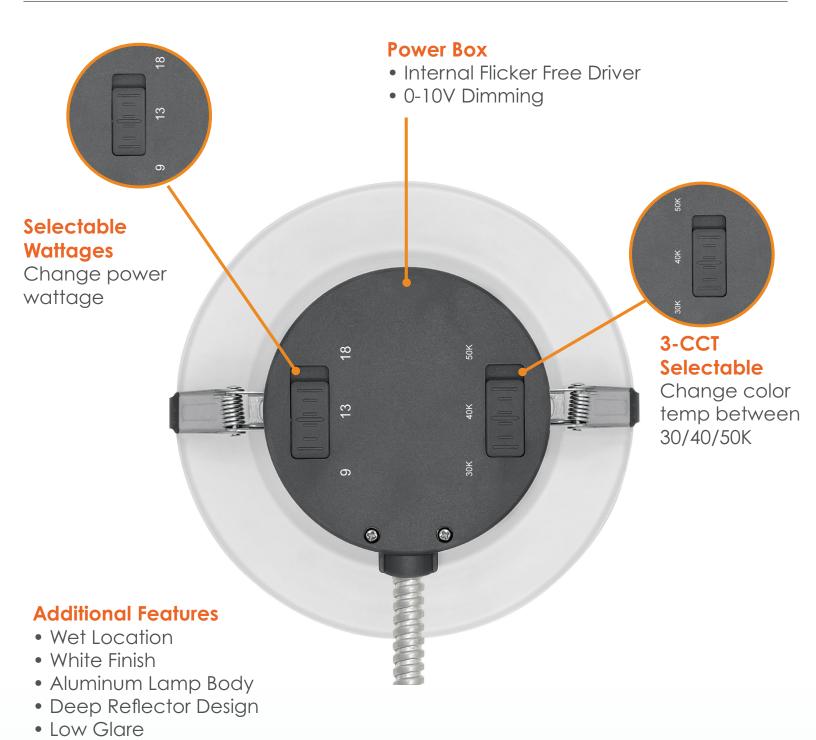





480V Step Down
Transformer
4S Junction Box
Optional Accessory
Available













Commercial Downlight Wattage + CCT Selectable 3 CCT: 30/40/50K

DIMENSIONS

ACCESSORIES



CMD-TRIM-4-BLK-SM

4 Black Reflector

CMD-TRIM-6-BLK-SM

6" Black Reflector

CMD-TRIM-8-BLK-SM

8" Black Reflector CMD-TRIM-10-BLK-SM


10" Black Reflector


TRIMS



GCMD-TRIM-4-HZ-SM

- 4" Clear-Spectacle Haze Reflector **GCMD-TRIM-6-HZ-SM**
- 6" Clear-Spectacle Haze Reflector CMD-TRIM-8-HZ-SM
- 8" Clear-Spectacle Haze Reflector CMD-TRIM-10-HZ-SM
- 10" Clear-Spectacle Haze Reflector





Cut Out Size: 4.9"

GOOF RINGS




GR-4-WH

4" Goof Ring, Inner Dim: 4" Outer Dim: 8" GR-6-WH

6" Goof Ring, Inner Dim: 6.3" Outer Dim: 10.5" GR-8-WH

8" Goof Ring, Inner Dim: 8" Outer Dim: 12.5"

GR-10-WH 10" Goof Ring, Inner Dim: 9" Outer Dim: 14.1"



Cut Out Size: 6-1/8" - 7-3/16"

BOX & PLATES





JBOX-ALM


Junction Box (6 Knock-Outs) C4-NC-RI-J-JBX


4" Commercial New Construction Plate with Joist Bar + J-Box C6-NC-RI-J-JBX

6" Commercial New Construction Plate with Joist Bar + J-Box C8/10-NC-RI-J-JBX

8/10" Commercial New Construction Plate with Joist Bar + J-Box

8 Inch





Cut Out Size: 7-1/2" - 8-7/8"

EMERGENCY BACK-UP



LED-EMB-25W-HV-0/10V

Emergency Back Up For Interal Drivers (Works with all 0-10V Dim or <25W fixtures -Single Sided Flex-

10 Inch

