

LED UFO High Bay

Model: SZ-HB200W-SACG-5000K (6) / SZ-HB200W-AT3B-5000K



Advantage:

- UL&DLC certificate
- 3030 Chip, high CRI
- Input voltage 120-277VAC
- No UV or IR in the beam
- Easy to install and operate
- Energy saving, long lifespan
- Light is soft and uniform, safe to eyes
- Instant start, NO flickering, NO humming
- Green and eco-friendly without mercury.



Application:

Warehouse, factory and workshops;
Highway toll station and gas station;
Exhibition hall;
Gymnasium and supermarkets, etc.

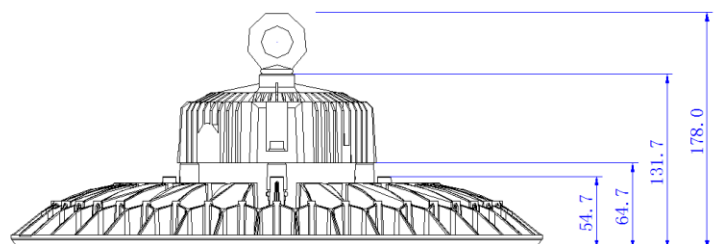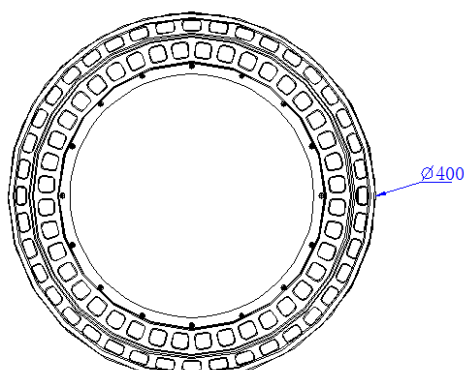

Product Specifications

Product Name	LED UFO High Bay
Light Type	SZ-HB200W-SACG-5000K (6) / SZ-HB200W-AT3B-5000K
Dimension	Φ400*178 mm

Technical Characteristic

Color temperature	5000K
CRI	>80
Lumen	26000LM
Lumen Efficacy	130LM/W
Input Power	200W
Viewing Angle	120 Degree
Input Voltage	120-277V 50/60Hz
Driver model	China Brand Driver (0-10V Dimmable)
PF	>0.9
Waterproof Rating	IP65



Materials

LED Type	3030/1.5W
LED QTY	238PCS
Housing	Aluminum(ADC12)
Housing color	Black
Cover	Glass
Operating Temperature	-40°C TO 45°C
Operating Humidity	10%-90% RH
Storage Temperature	-40°C TO 80°C

Others

Storage Humidity	10%-95%
Application	Outdoor
Safety Certification	UL&DLC
Warranty Time	5 Years

DATA OF LAMP		PHOTOMETRIC DATA Eff: 126.63 lm/W			
MODEL		I _{max} (cd)	13977	η street_up (%)	0.0
NOMINAL POWER (W)	200	LOR (%)	100.0	η street_down (%)	48.4
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	25650	η house_up (%)	0.0
NOMINAL FLUX (lm)	25649.8	MAXIMUM @ (C, γ)	75,15.5	η house_down (%)	51.6
LAMPS INSIDE	1	η up (%)	0.0	76 FLASHAREA (m2)	0.05000
TEST VOLTAGE (V)	120	η down (%)	100.0	SLI	20.173

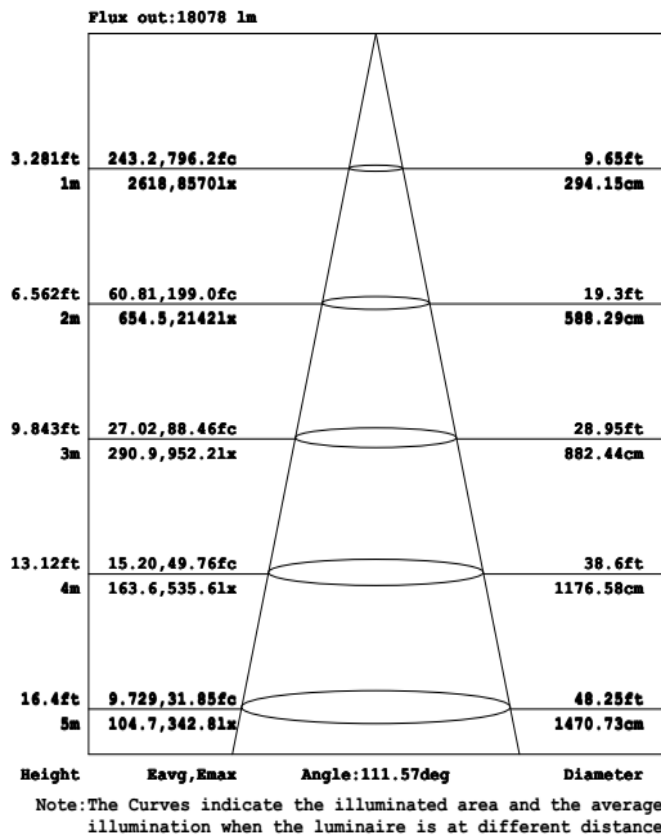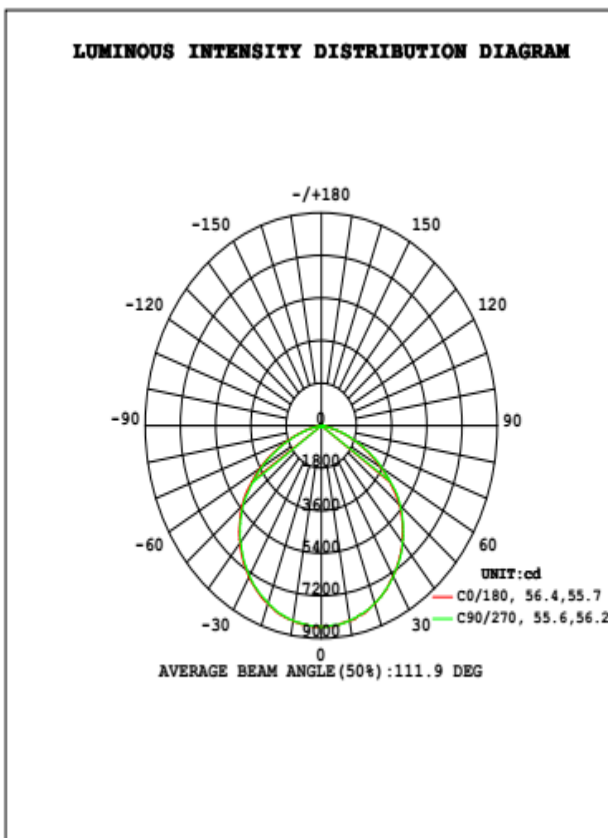

Package

Model	Net Weight	Size	Qty/Carton	Weight/Carton
SZ-HB200W-SACG-5000K (6) / SZ-HB200W-AT3B-5000K	4.23KG	445*445*155MM	1	5.18KG



