

Project Name:

Notes:

ZS-T8-30P4FT-INT

4' LED T8 Integrated Tube

	Date:	Туре:
8 4 '	A	and the second second
TÖ T	10°	
	L L L L L L	
1/2-1-		

DESCRIPTION Portor's integrate

Portor's integrated tubes have a V-shaped LED strip, and can be surface mounted and plugged directly into an electrical outlet, eliminating the need for a fixture to house the light. Integrated tubes are can be used in a variety of locations and applications.

Ideal use for signs, office spaces, warehouses, hotels, restaurants, and schools.

CONSTRUCTION

V-Shaped LED strip with high-quality polycarbonate lens diffuser with aluminum backing.100% Mercury Free and 100% Lead Free. Metal clips included for easy surface mounting.

ELECTRICAL

Integrated electrical input. Includes input connection. Luminaire is built with the highest quality 100-277VAC internal drivers.

000

DIMMING

Non-dimmable and not compatible with ballast.

RøHS

COMPLIAN

LISTING

ntertek

ETL Listed, FCC, RoHS, CE



WATTAGE	30W
LUMENS	up to 4,660 lumens
EFFICACY	145 lm/W
VOLTAGE	100V-277V
POWER FREQUENCY	50/60 Hz
CCT	(5000K) (6000K)
CRI	Ra>80
BEAM ANGLE	120°
LENS TYPE	(Frosted) (Clear)
WORKING TEMP.	-40°F - +122°F
STORAGE TEMP.	-40°F - +158°F
IP RATING	IP40 Suitable for damp locations
DIMMABLE	Non-dimmable
POWER FACTOR	>0.9
THD	≤20%
WARRANTY	5 year limited
PORTOR CAT#	PT-T8I-4F-30W

MODEL#	WATTS	LUMENS	LM/WATT	CCT	CRI	LENS	VOLTAGE	
ZS-T8-30P4FT-INT	30W	4,390	145	5000K	>80	Frosted	AC 100/277V	
						Clear		
		4,660 145	145	6000K	>80	Frosted	AC 100/277V	
			145			Clear		






ZS-T8-30P4FT-INT

4' LED T8 Integrated Tube


Project Name:	Notes:	Date:	Туре:

DIMENSION

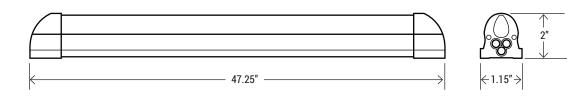


INSTALLATION

Place tube in location desired and connect cable to integrated area on tube. Suitable for use in enclosed fixtures or damp locations. Not for use where exposed to weather or moisture.

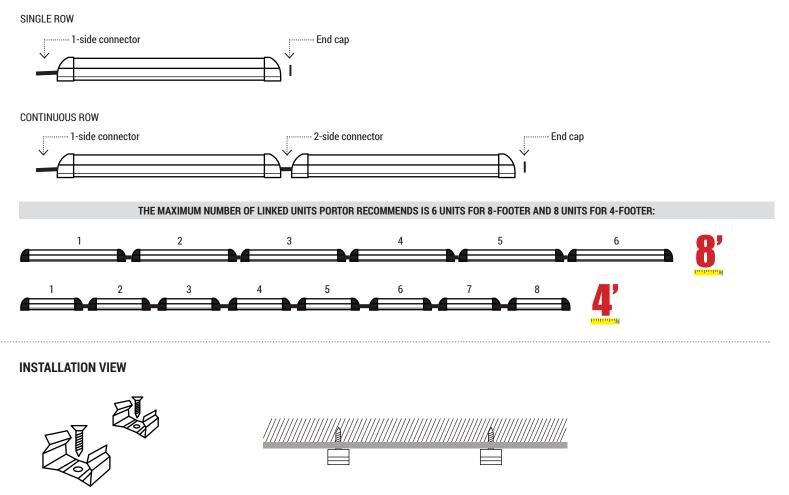

1. Position the metal clips for installation.

2. Use the supplied screws to secure the metal clips.



1. Gently press the tube into the metal clips until it is secured properly.

