


## G2WL-BK

### DOUBLE CONE LED SECURITY LIGHT WITH MOTION SENSOR

Automate dusk-to-dawn photocell functionality  
Aluminum housing / Black finish



|                 |                                  |
|-----------------|----------------------------------|
| Brightness      | 1400 Lumens                      |
| Input wattage   | 20 W                             |
| Efficacy        | 70 Lm/W                          |
| Power factor    | >0.9                             |
| Life            | 50,000 Hours                     |
| CRI             | 90+                              |
| Detect range    | up to 10 ft                      |
| Input voltage   | 120-277 V                        |
| Low temp start  | -5°F                             |
| Max temp.       | 104°F                            |
| Input Frequency | 60 Hz                            |
| Dimensions      | 10.04"(w) x 6.42"(d)<br>6.61"(h) |

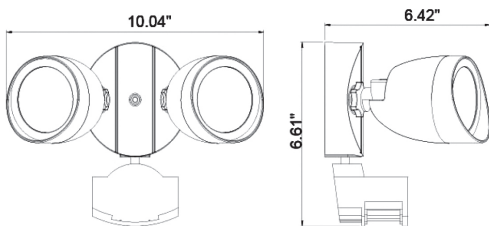

## DESCRIPTION

The MW G2WL-BK double cone security light increases safety and security for the area by illuminating dark exterior areas. It comes with an automate motion and photocell sensor. Light can be turned on automatic at night when the motion sensor picks up any movement within the detect range. Also, the dusk-to-dawn technology allows the light to be turned ON at night and turned OFF in the morning when it has been put into Dusk to Dawn mode.

The G2WL-BK security light is Energy Star® and UL certified. It's designed to be robust and long-lasting; the die-casting aluminum housing protects the light against extreme weather. It satisfies most application needs in landscaping, side walk, parking lots, public area and other outdoor usage.

## KEY FEATURES

- Adjustable Motion & photocell sensor
- Dusk-to-dawn technology
- Timer included
- Die-casting aluminum housing
- IC rated
- Wet location listed
- Energy Star and UL certified

## SPECIFICATION FEATURES

### ADJUSTABLE MOTION & PHOTOCELL SENSOR

- Motion detect sensitivity adjustable
- Lighting time adjustable
- Automate dusk-to-dawn functionality

### CONSTRUCTION & OPTICS

- Unit includes die-cast aluminum housing, LED array, heat sink, lens, foam gasket and adjustable motion sensor.
- High quality PC lens.
- Efficiency LED array.
- Diffuse for uniform illumination.
- \* Optional PMMA lens available.

### DRIVER

- 120-277V universal input voltage.

### MOUNTING

- Pre-wired motion sensor.
- wiring nuts and fasten included.

### COMPLIANCE/CERTIFICATION

- ENERGY STAR® listed.
- UL certified.
- EMI/RFI emissions per FCC 47CFR Part 15B.
- RoHS compliant, contains no mercury or lead.
- Suitable for wet locations.

### WARRANTY

- 5 years manufacturer warranty, consult [www.mwledlighting.com](http://www.mwledlighting.com) for more details.
- \* Terms and conditions may apply.

