


### **INDICATOR LIGHTS** • Incandescent, Neon & LED

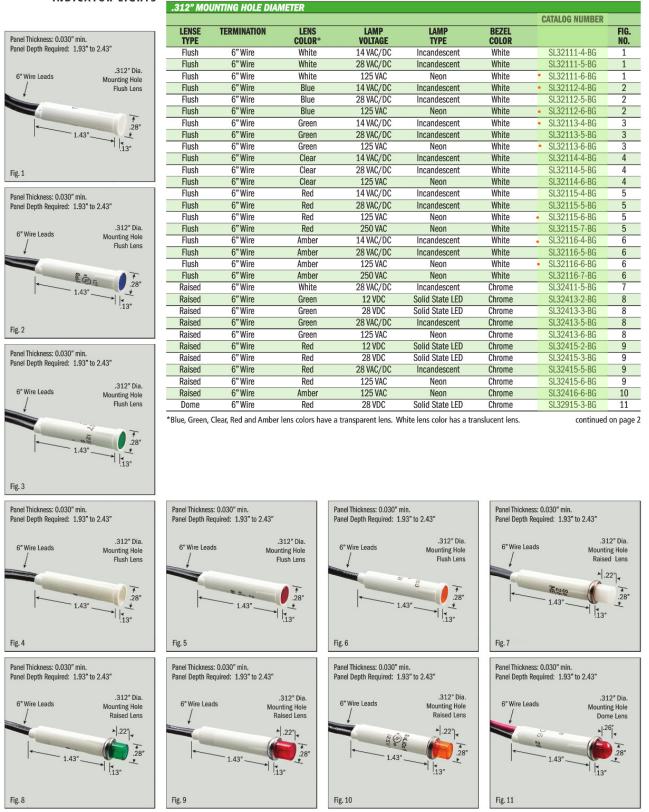

All specifications and dimensions are for reference only. If specific information is needed and/or of critical nature, contact Selecta Products headquarters for specific information before ordering.

1 SELECTA PRODUCTS, INC. • Tehachapi, CA • Memphis, TN • 800-722-6445 • 800-433-4319 FAX • www.selectainc.com • orders@selectainc.com

#### DENOTES STOCK AT CNC ELECTRIC SO EL MONTE

# **INDICATOR LIGHTS** • Incandescent & Neon




							CATALOG NUMBER	
LENSE Type	TERMINATION	LENS COLOR*	LAMP Voltage	LAMP Type	BEZEL COLOR			FI
Flush	6" Wire	White	14 VAC/DC	Incandescent	Stainless	•	SL53211-4-BG	1
Flush	6" Wire	White	28 VAC/DC	Incandescent	Stainless		SL53211-5-BG	1
Flush	6" Wire	White	125 VAC	Neon	Stainless	•	SL53211-6-BG	1
Flush	6" Wire	Blue	14 VAC/DC	Incandescent	Stainless	•	SL53212-4-BG	2
Flush	6" Wire	Blue	28 VAC/DC	Incandescent	Stainless		SL53212-5-BG	2
Flush	6" Wire	Blue	125 VAC	Neon	Stainless	•	SL53212-6-BG	2
Flush	6" Wire	Blue	250 VAC	Neon	Stainless		SL53212-7-BG	2
Flush	6" Wire	Green	14 VAC/DC	Incandescent	Stainless		SL53213-4-BG	3
Flush	6" Wire	Green	28 VAC/DC	Incandescent	Stainless		SL53213-5-BG	3
Flush	6" Wire	Green	125 VAC	Neon	Stainless		SL53213-6-BG	3
Flush	6" Wire	Green	250 VAC	Neon	Stainless		SL53213-7-BG	3
Flush	6" Wire	Green	480 VAC	Neon	Stainless		SL53213-8-BG	3
Flush	6" Wire	Clear	14 VAC/DC	Incandescent	Stainless	•	SL53214-4-BG	1
Flush	6" Wire	Clear	28 VAC/DC	Incandescent	Stainless		SL53214-5-BG	1
Flush	6" Wire	Clear	125 VAC	Neon	Stainless		SL53214-6-BG	L
Flush	6" Wire	Clear	250 VAC	Neon	Stainless		SL53214-7-BG	1
Flush	6" Wire	Red	14 VAC/DC	Incandescent	Stainless	•	SL53215-4-BG	Ę
Flush	6" Wire	Red	28 VAC/DC	Incandescent	Stainless		SL53215-5-BG	Ę
Flush	6" Wire	Red	125 VAC	Neon	Stainless		SL53215-6-BG	!
Flush	6" Wire	Red	250 VAC	Neon	Stainless		SL53215-7-BG	ļ
Flush	6" Wire	Red	480 VAC	Neon	Stainless		SL53215-8-BG	Ę
Flush	6" Wire	Amber	14 VAC/DC	Incandescent	Stainless	•	SL53216-4-BG	(
Flush	6" Wire	Amber	28 VAC/DC	Incandescent	Stainless		SL53216-5-BG	(
Flush	6" Wire	Amber	125 VAC	Neon	Stainless		SL53216-6-BG	(
Flush	6" Wire	Amber	250 VAC	Neon	Stainless		SL53216-7-BG	(
Flush	.187" Q.C.	Green	28 VAC/DC	Incandescent	Stainless		SL53223-5-BG	1
Flush	.187" Q.C.	Green	125 VAC	Neon	Stainless		SL53223-6-BG	1
Flush	.187" Q.C.	Red	28 VAC/DC	Incandescent	Stainless		SL53225-5-BG	8
Flush	.187" Q.C.	Red	125 VAC	Neon	Stainless		SL53225-6-BG	8
Flush	.187" Q.C.	Red	250 VAC	Neon	Stainless		SL53225-7-BG	8
Flush	.187" Q.C.	Amber	125 VAC	Neon	Stainless		SL53226-6-BG	9

Panel Thickness: 0.030" to 0.0903

Panel Depth Required: 1.41" to 1.91"



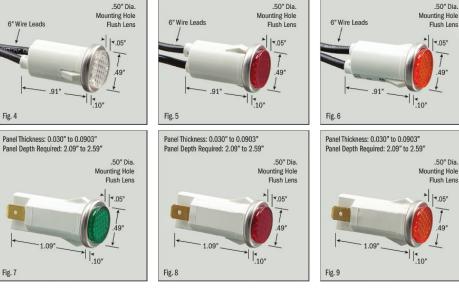


Panel Thickness: 0.030" to 0.0903 Panel Depth Required: 1.41" to 1.91"

All specifications and dimensions are for reference only. If specific information is needed and/or of critical nature, contact Selecta Products headquarters for specific information before ordering.



# **INDICATOR LIGHTS** • Incandescent & Neon

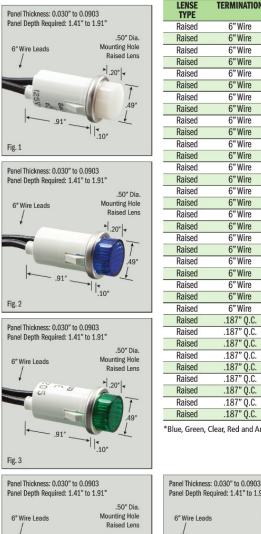

						CATALOG NUMBER		
ENSE Type	TERMINATION	LENS COLOR*	LAMP Voltage	LAMP Type	BEZEL COLOR		FIG	
laised	6" Wire	White	14 VAC/DC	Incandescent	Stainless	• SL53411-4-BG	1	
laised	6" Wire	White	28 VAC/DC	Incandescent	Stainless	SL53411-5-BG	1	
laised	6" Wire	White	125 VAC	Neon	Stainless	SL53411-6-BG	1	
aised	6" Wire	White	250 VAC	Neon	Stainless	SL53411-7-BG	1	
laised	6" Wire	Blue	14 VAC/DC	Incandescent	Stainless	SL53412-4-BG	2	
laised	6" Wire	Blue	28 VAC/DC	Incandescent	Stainless	SL53412-5-BG	2	
laised	6" Wire	Blue	125 VAC	Neon	Stainless	SL53412-6-BG	2	
laised	6" Wire	Blue	250 VAC	Neon	Stainless	SL53412-7-BG	2	
laised	6" Wire	Green	14 VAC/DC	Incandescent	Stainless	<ul> <li>SL53413-4-BG</li> </ul>	3	
laised	6" Wire	Green	28 VAC/DC	Incandescent	Stainless	SL53413-5-BG	3	
laised	6" Wire	Green	125 VAC	Neon	Stainless	SL53413-6-BG	3	
laised	6" Wire	Green	250 VAC	Neon	Stainless	SL53413-7-BG	3	
laised	6" Wire	Green	480 VAC	Neon	Stainless	SL53413-8-BG	3	
laised	6" Wire	Clear	14 VAC/DC	Incandescent	Stainless	SL53414-4-BG	4	
aised	6" Wire	Clear	28 VAC/DC	Incandescent	Stainless	SL53414-5-BG	4	
laised	6" Wire	Clear	125 VAC	Neon	Stainless	• SL53414-6-BG	4	
aised	6" Wire	Clear	250 VAC	Neon	Stainless	SL53414-7-BG	4	
laised	6" Wire	Red	14 VAC/DC	Incandescent	Stainless	• SL53415-4-BG	5	
laised	6" Wire	Red	28 VAC/DC	Incandescent	Stainless	SL53415-5-BG	5	
laised	6" Wire	Red	125 VAC	Neon	Stainless	SL53415-6-BG	5	
aised	6" Wire	Red	250 VAC	Neon	Stainless	SL53415-7-BG	5	
laised	6" Wire	Amber	14 VAC/DC	Incandescent	Stainless	SL53416-4-BG	6	
aised	6" Wire	Amber	28 VAC/DC	Incandescent	Stainless	SL53416-5-BG	6	
laised	6" Wire	Amber	125 VAC	Neon	Stainless	SL53416-6-BG	6	
aised	6" Wire	Amber	250 VAC	Neon	Stainless	SL53416-7-BG	6	
laised	.187" Q.C.	White	125 VAC	Neon	Stainless	SL53421-6-BG	7	
laised	.187" Q.C.	Green	28 VAC/DC	Incandescent	Stainless	SL53423-5-BG	8	
laised	.187" Q.C.	Green	125 VAC	Neon	Stainless	SL53423-6-BG	8	
aised	.187" Q.C.	Green	250 VAC	Neon	Stainless	SL53423-7-BG	8	
laised	.187" Q.C.	Red	28 VAC/DC	Incandescent	Stainless	SL53425-5-BG	9	
aised	.187" Q.C.	Red	125 VAC	Neon	Stainless	SL53425-6-BG	9	
aised	.187" Q.C.	Red	250 VAC	Neon	Stainless	SL53425-7-BG	9	
aised	.187" Q.C.	Amber	28 VAC/DC	Incandescent	Stainless	SL53426-5-BG	10	
aised	.187" Q.C.	Amber	125 VAC	Neon	Stainless	SL53426-6-BG	10	

\*Blue, Green, Clear, Red and Amber lens colors have a transparent lens. White lens color has a translucent lens.


Panel Thickness: 0.030" to 0.0903

1.09

·||\* .10"

Panel Depth Required: 1.41" to 1.91"

continued on page 4



6" Wire Leads Raised Lens × .20" -G a 10' .91 \*| |• .10" Fig. 6 Panel Thickness: 0.030" to 0.0903" Panel Depth Required: 2.09" to 2.59" .50" Dia. Mounting Hole Raised Lens .20"

.50" Dia.

Mounting Hole



Fig. 10 All specifications and dimensions are for reference only. If specific information is needed and/or of critical nature, contact Selecta Products headquarters for specific information before ordering.

3 SELECTA PRODUCTS, INC. • Tehachapi, CA • Memphis, TN • 800-722-6445 • 800-433-4319 FAX • www.selectainc.com • orders@selectainc.com

#### DENOTES STOCK AT CNC ELECTRIC SOUTH EL MONTE

#### **INDICATOR LIGHTS** • Incandescent, Neon & LED



Panel Thickness: 0.030" to 0.0903

						CATALOG NUMBER	
LENSE TYPE	TERMINATION	LENS COLOR*	LAMP Voltage	LAMP TYPE	BEZEL COLOR		FIG. NO.
Hooded	6" Wire	Clear	14 VAC/DC	Incandescent	Black	<ul> <li>SL53614-4-BG</li> </ul>	1
Hooded	6" Wire	Clear	125 VAC	Neon	Black	<ul> <li>SL53614-6-BG</li> </ul>	1
Dome	6" Wire	Green	125 VAC	Neon	Stainless	SL53813-6-BG	2
Dome	6" Wire	Red	14 VAC/DC	Incandescent	Stainless	SL53815-4-BG	3
Dome	6" Wire	Red	28 VAC/DC	Incandescent	Stainless	SL53815-5-BG	3
Dome	6" Wire	Red	125 VAC	Neon	Stainless	SL53815-6-BG	3
Dome	6" Wire	Amber	28 VAC/DC	Incandescent	Stainless	SL53816-5-BG	4
Dome	6" Wire	Amber	125 VAC	Neon	Stainless	SL53816-6-BG	4
Small Dome	6" Wire	Green	12 VDC	Solid State LED	Stainless	SL53913-2-BG	5
Small Dome	6" Wire	Green	28 VDC	Solid State LED	Stainless	SL53913-3-BG	5
Small Dome	6" Wire	Green	120 VAC	Solid State LED	Stainless	SL53913-9-BG	5
Small Dome	6" Wire	Red	12 VDC	Solid State LED	Stainless	SL53915-2-BG	6
Small Dome	6" Wire	Red	28 VDC	Solid State LED	Stainless	SL53915-3-BG	6

\*Blue, Green, Clear, Red and Amber lens colors have a transparent lens. White lens color has a translucent lens.

continued on page 5











All specifications and dimensions are for reference only. If specific information is needed and/or of critical nature, contact Selecta Products headquarters for specific information before ordering.