



CR-7082

Combo Emergency Exit Light





FEATURES

- Injection-molded thermoplastic ABS housing
- UL-94V-0 flame rating, fire-resistant
- Input Voltage: 120/277V 60Hz
- Power consumption: 1.2W
- Output: 2.8W
- 3.6V Nickel Cadmium Battery
- Charging time: 24 hours
- Discharge time: 90 minutes
- Operating temperature: 0°C~40°C
- Suitable for use in damp locations
- Dimension: 500*184.5*108.34mm

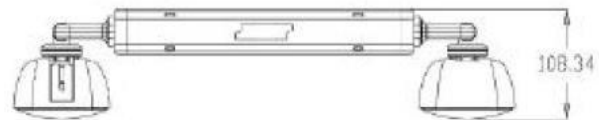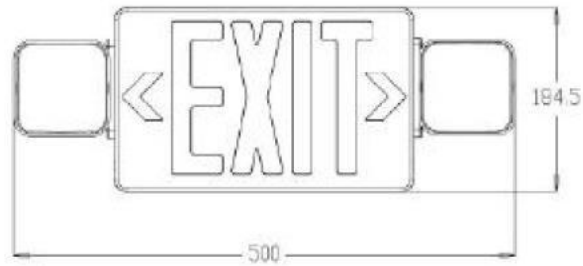

PHOTOMETRIC

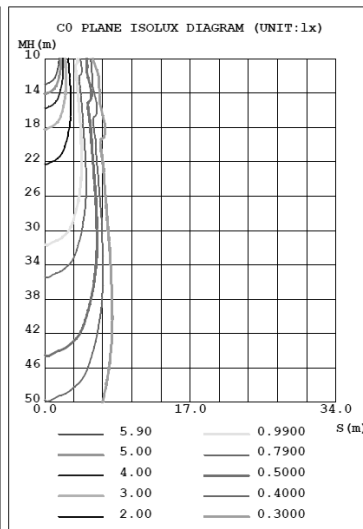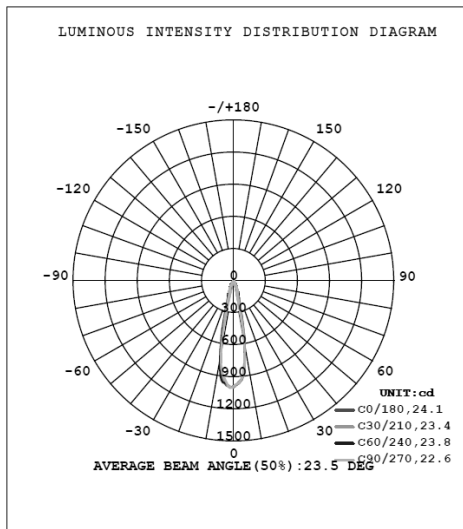

ORDER INFORMATION

Model	Voltage	Color	Emergency Duration	Certificate
CR-7082RX	120/277V	Red	90 minutes	UL
CR-7082GX	120/277V	Green	90 minutes	UL