

# Shenzhen Lighting Inc.

www.shenzhenlighting.com

F5, Building B, Hansheng Industrial Park

XingGuang XingHui 1st Street

HuangJiang Town

DongGuan GuangDong CHINA

Tel:86-769-82260508




## Model: SZ-CNP150WSAS-Z

## LED Canopy Light

### Features

- DLC and UL Certificate.
- IP65 driver, input voltage 100-277VAC.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.



### Specification

Input Power	150W
Lumen	18750 - 19050LM
Lumen Efficacy	125-127 LM/W
Color Temperature	4000K 4500K 5000K 5700K.
CRI	>80
Viewing Angle	120 Degree
Input Voltage	100-277VAC 50/60Hz
PF	≥0.9
THD	≤20%
Driver Model	China Brand Driver
LED Brand	HongLi
LED Type	SMD2835 (0.5W)
LED QTY	465 PCS
Housing	Aluminum Alloy
Housing Color	White
Cover	Stripe Lens
Waterproof Rating	WET (IP65)
Operating Temperature	-40°C TO +60°C
Operating Humidity	10%-90% RH
Storage Temperature	-40°C TO +85°C
Storage Humidity	5%-95% RH
Warranty Time	5 Years

For sales inquiry, please contact our office or send us an email

info@shenzhenlighting.com



## Photometric Results

CIE Class: Direct  
 Measurement Flux: 18965.2 lm  
 Downward Ratio: 99%  
 Horizontal Diffuse Angle(50%): H117.8  
 Vertical Diffuse Angle(50%): V119  
 Luminaire Efficacy Rating (LER): 126.15  
 Max. Intensity: 6207.61 cd  
 S/MH(C0/C180): 1.32

Total Rated Lamp Lumens: 18965.2 lm  
 Efficiency: 100%  
 Upward Ratio: 1%

Central Intensity: 5953.13 cd  
 Pos of Max. Intensity: H45 V10  
 S/MH(C90/C270): 1.32

Luminous Intensity Distribution Curve

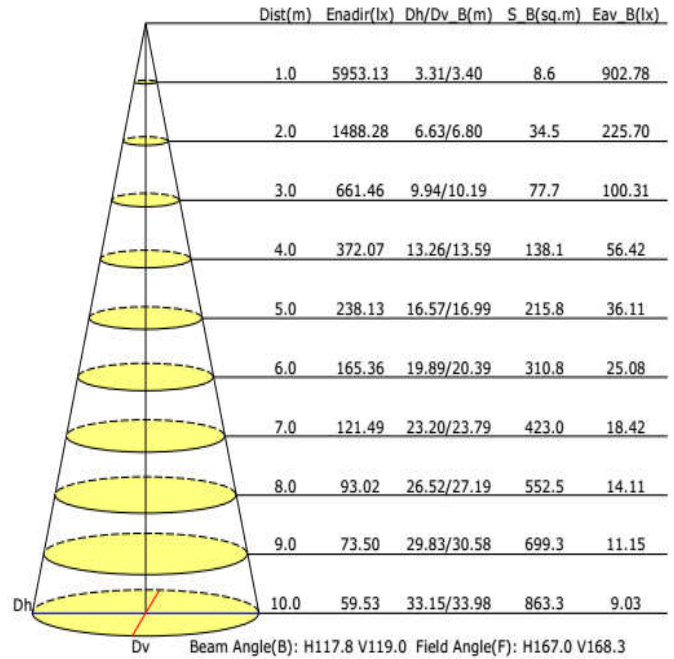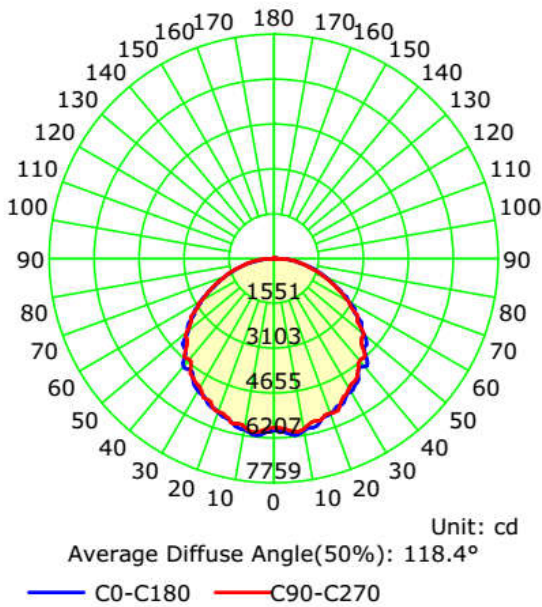

## NOTICE FOR USER

- Please turn off power before install or change assembly parts.
- The input voltage and lamps should be matched, after connecting the power line, Please make sure the wiring section is insulated.
- No-professionals, must not install and disassemble the lamps.

## TROUBLE SHOOTINGS

Troubles	Check points
Flickering of the light	Turn off the power and turn on again in 3 minutes. If same phenomena occur, then call agencies.
Out of working	Please check the connection.

 **PACKAGE**

	Size	Qty/ Carton	Weight/ Carton
Outer box	425 x 420 x 120mm	1 PC	5.1 KG

